



JORHSON



JORHSON

CHAIN BLOCK

- Experience exceptional durability thanks to all-steel construction featuring rugged gear case enclosure and hand wheel cover.
- Enjoy increased lifting height thanks to low headroom.
- Compact design results in lightweight and easy portability.
- Minimize manual effort thanks to efficient drive train.
- Standard slip clutch device prevents the hoist from being used to lift damaging loads beyond rated capacity.
- Double pawl springs provide redundancy for reliable operation of brake mechanism.
- Get reliable braking with double enclosed brake cover that keeps out dust, rain, and dirt.



Model : HSZ



Tail ring holder



Overload Protection Device



Casting guide wheel



Sealed roller bearings




G80 Chain




Safety Hook


JORHSON

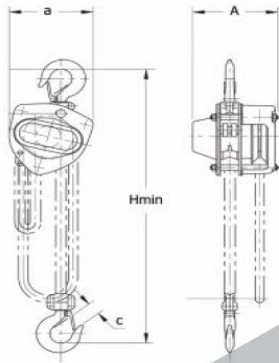


0.25-2ton

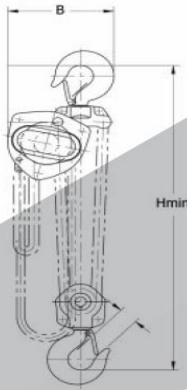

3-5ton

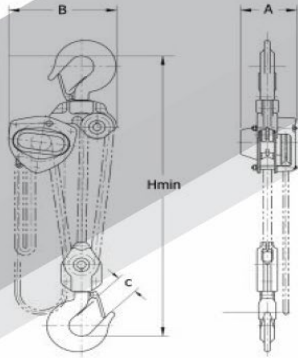

10ton

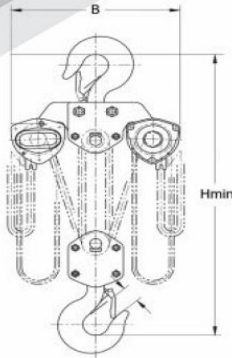

20-30ton



HSZ1	804,00
HSZ2	1 160,40
HSZ3/5	1 872,00
HSZ5/3	2 232,00
HSZ5/6	2 820,00

Specifications:

Model		HSZ1	HSZ2	HSZ3	HSZ5	HSZ10	HSZ20
W.L.L(kg)		1000	2000	3000	5000	10000	20000
Lift(m)		3	3	3	6	3	3
Load Chain	Falls	1	1	2	2	4	8
	Size	6x18	8x24	7.1x21	9x27	9x27	9x27
Hand Force(N)		250	335	265	360	380	380x2
N.W(kg)		12.5	19.5	23.5	41.3	78.5	193
Dimensions	A(mm)	151	175	173	189	189	189
	B(mm)	172	210	226	280	463	630
	C(mm)	32	36	46	46	57	82
	Hmin(mm)	376	470	490	688	765	890
Packing Size(cm)		28x21x21	34x26x20	34x26x20	41x32x24	48x42x18.5	78x68x20

MECHANICAL STEEL JACK



SAFETY RATCHET CRANK

One - sided braking effect and the load is held safety at every height with folding handle.





SAFETY RAIL JACK

High stability on uneven ground is ensured by the extra large floor plate.



Model : RJ



Specifications:

RJ3	1 839,60
RJ5	2 352,00
RJ10	4 080,00
RJ20	7 440,00

Model	Safe Working Load (t)	Height of Load (mm)	Lifting Height (mm)	Height of Claw in Lowest Position (mm)	Net Weight (kg)
SJ-A5	5.0	725	350	70	27
SJ-A 10	10	800	350	90	47
SJ-A 20	20	950	400	95	73

JORHSON

MINI ELECTRIQUE WIRE ROPE HOIST





PAB800	1 620,00
PAB1000	2 220,00

Model	PAB800	PAB1000
Rated volt(V)	220V 50HZ	
Input Power(w)	1350	1600
Capacity load(kg)	400/800	500/1000
Packing dimensions (cm)	45×34×27	54×25×32
G.W/N.W(kg)	38/36	40/38
Qty/CTN(pcs)	2	1

JORHSON

ELECTRIC CHAIN HOIST

JSHK1/6	8160,00
JSHK2/6	9 720,00
JSHK3/6	20 160,00
JSHK5/6	23 760,00

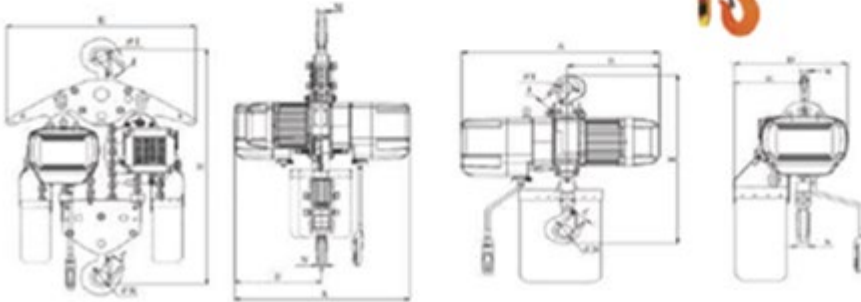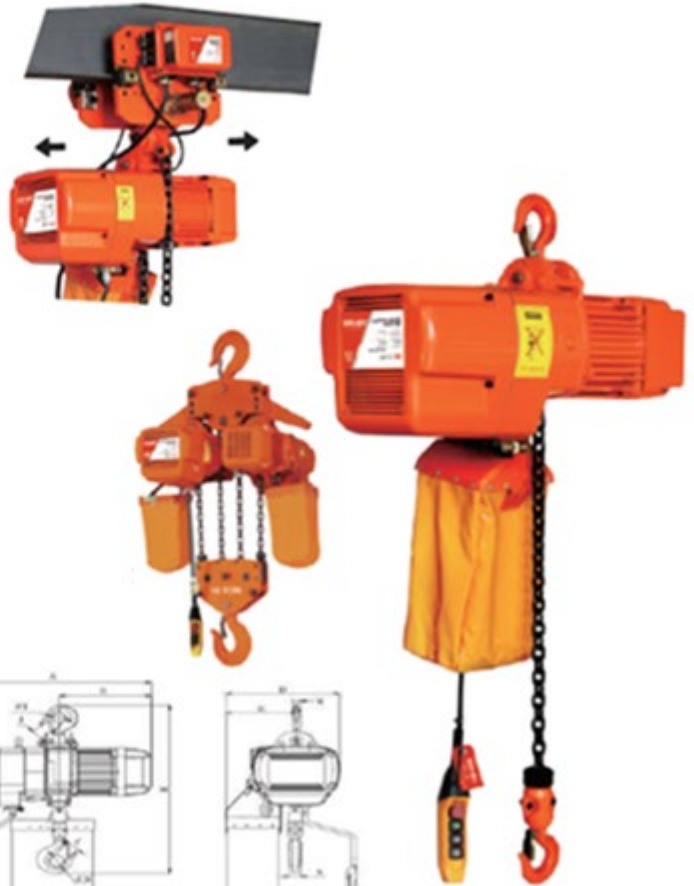

Model : JSHK

TECHNICAL SPECIFICATION



Model	Load Capacity (t)	Lifting Height (m)	Load Chain		Lifting Speed (m/min)	Travelling Speed (m/min)	Lifting Motor						Running Motor					I-Steel Track (mm)	Net Weight (kg)	Gross Weight (kg)
			Diameter (mm)	Chain Fall Number			Power (Kw)	E.D. Rating(%)	Rotary Speed (m/min)	Phase	Voltage (V)	Frequency (Hz/s)	Power (Kw)	Rotary Speed(m/min)	Phase	Voltage (V)	Frequency (Hz/s)			
ELECTRIC HOIST KD	2T	6	10	1	5,4	11	3	40	1440	3Phase	380V	50	0,75	1440	3Phase	380V	50	82-178	106	72
	3T	6	11,2	1	5,4	11	3	40	1440	3Phase	380V	50	0,75	1440	3Phase	380V	50	100-178	114	127
	5T	6	11,2	2	2,7	11	3	40	1440	3Phase	380V	50	0,75	1440	3Phase	380V	50	112-178	145	159

DIMENSION SPECIFICATION

Model	Load Capacity (t)	Dimensions(mm)											Net weight (kg)	Gross Weight (kg)
		H	A	B	D	E	I	J	K	L	M	N		
ELECTRIC HOIST KD	2T	640	733	343	430	265	31	38	49	40	28	28	47	52
	3T	685	733	343	430	265	36	48	59	48	34	34	57	63
	5T	870	733	343	430	325	43	48	60	48	42	42	76	83

JORHSON

HAND WINCH

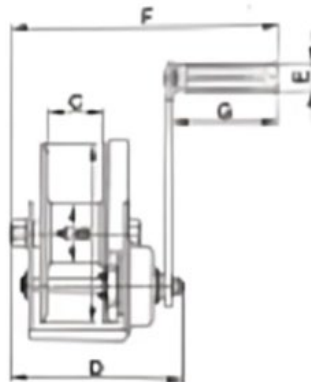


Model : JWL

JWL1200	288,00
JWL1800	348,00
JWL800	234,00

Model	Rated capacity(lbs)	Test load (KN)	Transmission ratio	Hand operated strength(N)	Dimensions(mm)										Net weight (kg) (no wire rope)
					A	B	C	D	E	F	G	H	J	R	
BHW-12	1200	8	4.2:1	180	Φ48	Φ134	51	157	Φ27	273	110	156	184	208	3.7
BHW-18	1800	12	5:1	190	Φ60	Φ180	60	190	Φ27	288	110	203	246	319	8.1
BHW-26	2600	17.5	10:1	190	Φ75	Φ180	63	209	Φ27	307	110	216	294	319	10.3

WIRE ROPE HOIST

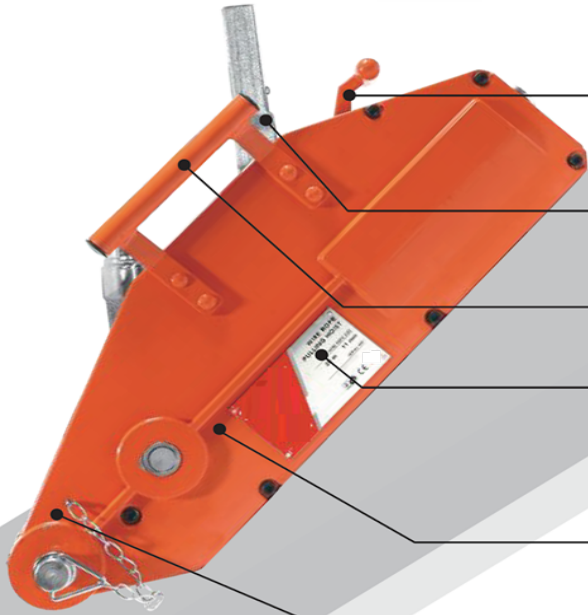

Rope clamp system

Easily disengaged with a lever allowing smooth installation of the wire rope.

Backward lever&Forward lever

Placed in tandem providing a slim design and assuring power transfer along the center.

Spares hear pins

Two spares hear pins located in the carrying handle.

Stamped serial number

for easy identification.

High strength cast aluminium alloy body

Lightweight, simple to operate, Smooth contour design with large, flat bottom surface for increased stability in horizontal as well vertical working position.

Anchor bolt

Offers numerous and versatile connection possibilities with load hooks, sling ropes and sling chains.

WR1.6/20	2 266,80
WR3.2/20	3 781,20

Galvanized steel wire rope mounted on a reel

Every rope is operationally tested to 150% of the rated capacity and issued with an individual test certificate.



Adjustable handle

For easy operation.

Model: WR

Specification

Item No.	WR16	WR32	WR54
Lifting capacity(kg)	1600	3200	5400
Pulling capacity(kg)	2800	6000	10125
Tested to(kg)	3000	6000	10125
Steel wire rope dia.(mm)	IWR11	IWRC16	IWRC20
Wire rope safety factor load capacity(kg)	5xWLL	5xWLL	5xWLL
Breaking strength of wire rope(kg)	9680	17200	27000
Overall structure breaking strength(kg)	4xWLL	4xWLL	4xWLL
Safety device	Safety pins	Safety pins	Safety pins
Net weight wire rope (20m)	12	24	45.5
Net weight (without wire Rope)(kg)	12	23	54.5

JORHSON

ELECTRIC TROLLEY

JDCC1	3 840,00
JDCC2	4 320,00
JDCC3	5 400,00
JDCC5	6 960,00

HOIST PERFECT MATCH

Cocok dan mudah untuk dipasangkan dengan hoist jenis apapun

SIDE GUIDE ROLLERS

4 buah Roda pemandu yang membuat pergerakan mulus & terjaga dari kea

IP54

IP 54 PROTECTION LEVEL

Proteksi Mesin dari berbagai jenis debu hingga semburan air

ANTI-FRACTURE STEEL WHEELS





Struktur roda padat cocok untuk segala profil balok

WORM GEAR TRANSMISSION

Pemulaan kerja mesin yang mulus dan rem otomatis



Model : JDCC

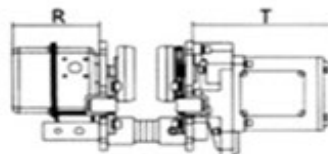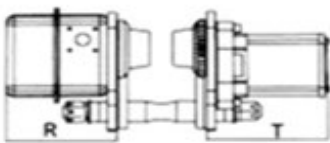

Model	Capacity(T)	Unit(mm)				Speed (m/ min)	Motor (kw)	Minimum radius of turn 最小转弯半径
		A	B	R	T			
JDCC1	1	315	205	142	231	快速 21m/min & 慢速 11m/min	0.4	1.3
JDCC2	2	325	217				0.4	1.5
JDCC3	3	340	250				0.75	1.6
JDCC5	5	400	291				0.75	1.8

PLAIN TROLLEY

- All structural parts made of high quality steel.
- Adjustable to any beam width, simply by adjusting the number of collars.
- High grade sealed ball bearings.
- With anti - drop plates.
- Galvanized hand chain.




MOVEMENT MECHANISM
Trolley moves smoothly on cast iron flanged wheels equipped with sealed, lubed for life ball bearings.



ADJUSTABLE WIDTH
The wheels are made to fit any shape of a beam.




Model : PT

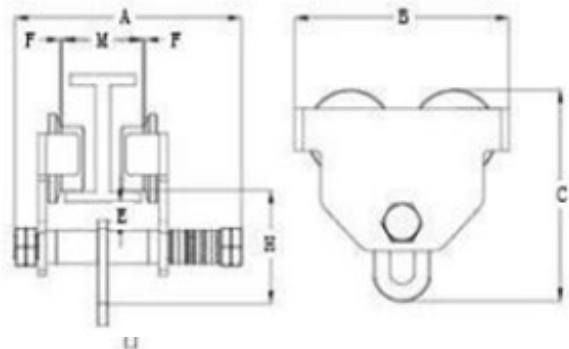

TECHNICAL SPECIFICATION

Capacity (t)	I-BEAM(mm)	Dimensions(mm)						Net weight (kg)	Carton Size (mm)
	M	A	B	C	E	H	F		
1T	80-140mm	220	250	214	11	118	1.5-3	8	310*100*200
2T	80-142mm	243	270	227	14	125	1.5-3	11	340*130*210
3T	95-168mm	268	315	304	8	165	1.5-3	22	395*130*250
5T	100-255mm	305	358	334	21	183	1.5-3	30	440*150*300

HYDRAULIC HAND PALLET TRUCK

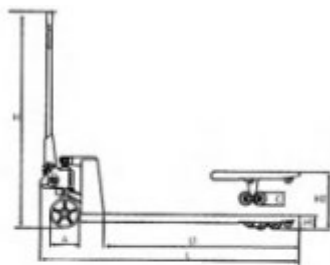

LOWER POSITION

Tarik tuas untuk menurunkan



NEUTRAL POSITION

Posisi untuk menarik & mendorong




LIFTING POSITION

Tekan tuas untuk memompa



TUAS ERGONOMIS

Kendali dalam satu gengaman

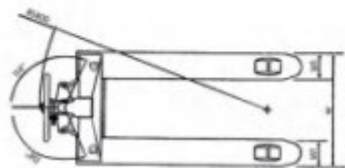



HYDRAULIC HAND PALLET



Model : GSN

MODEL	Capacity (t)	Lifting Height (mm)	Fork Length (mm)	Fork Width (mm)	Fork Height		Wheel Tandem (mm)	Steering Wheel (mm)	Wheel Materials	Self Weight (kg)
					Max (mm)	Min (mm)				
3000 KG	3	110	1220	685	85	195	80x70	180x50	PU	80
5000 KG	5	110	1220	685	85	195	80x70	180x50	Nylon	110

JORHSON

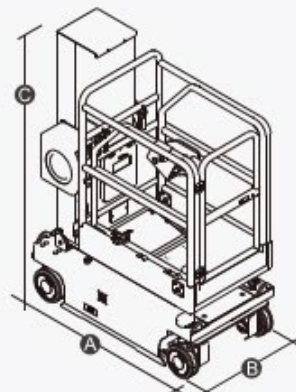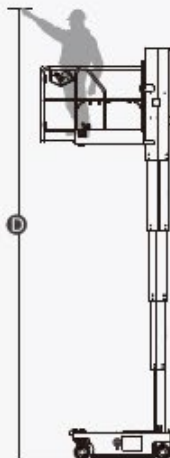

JORHSON

Quality of your service

Do you have any questions?

Sales Stores

Adress : 60, Rue d'Ifni 20300

CasablancaMorocco

Tel.: +212 5 22 31 31 27

Fax : +212 5 22 30 12 99

SHOWROOMS & Stors

Adress : 97, Lot. Mauritania El Bernoussi

Ain SebâaMorocco

Tel.: +212 5 22 35 83 80

Fax : +212 5 22 35 84 30

Email : info@metallifni.ma

